
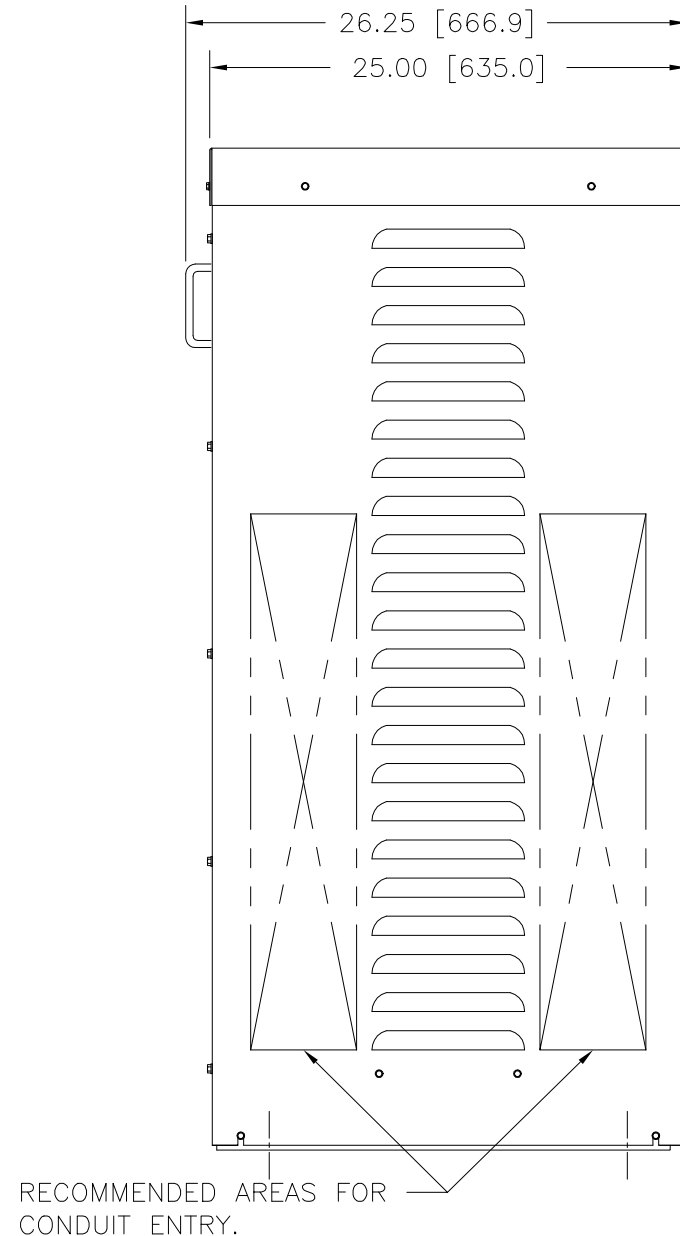
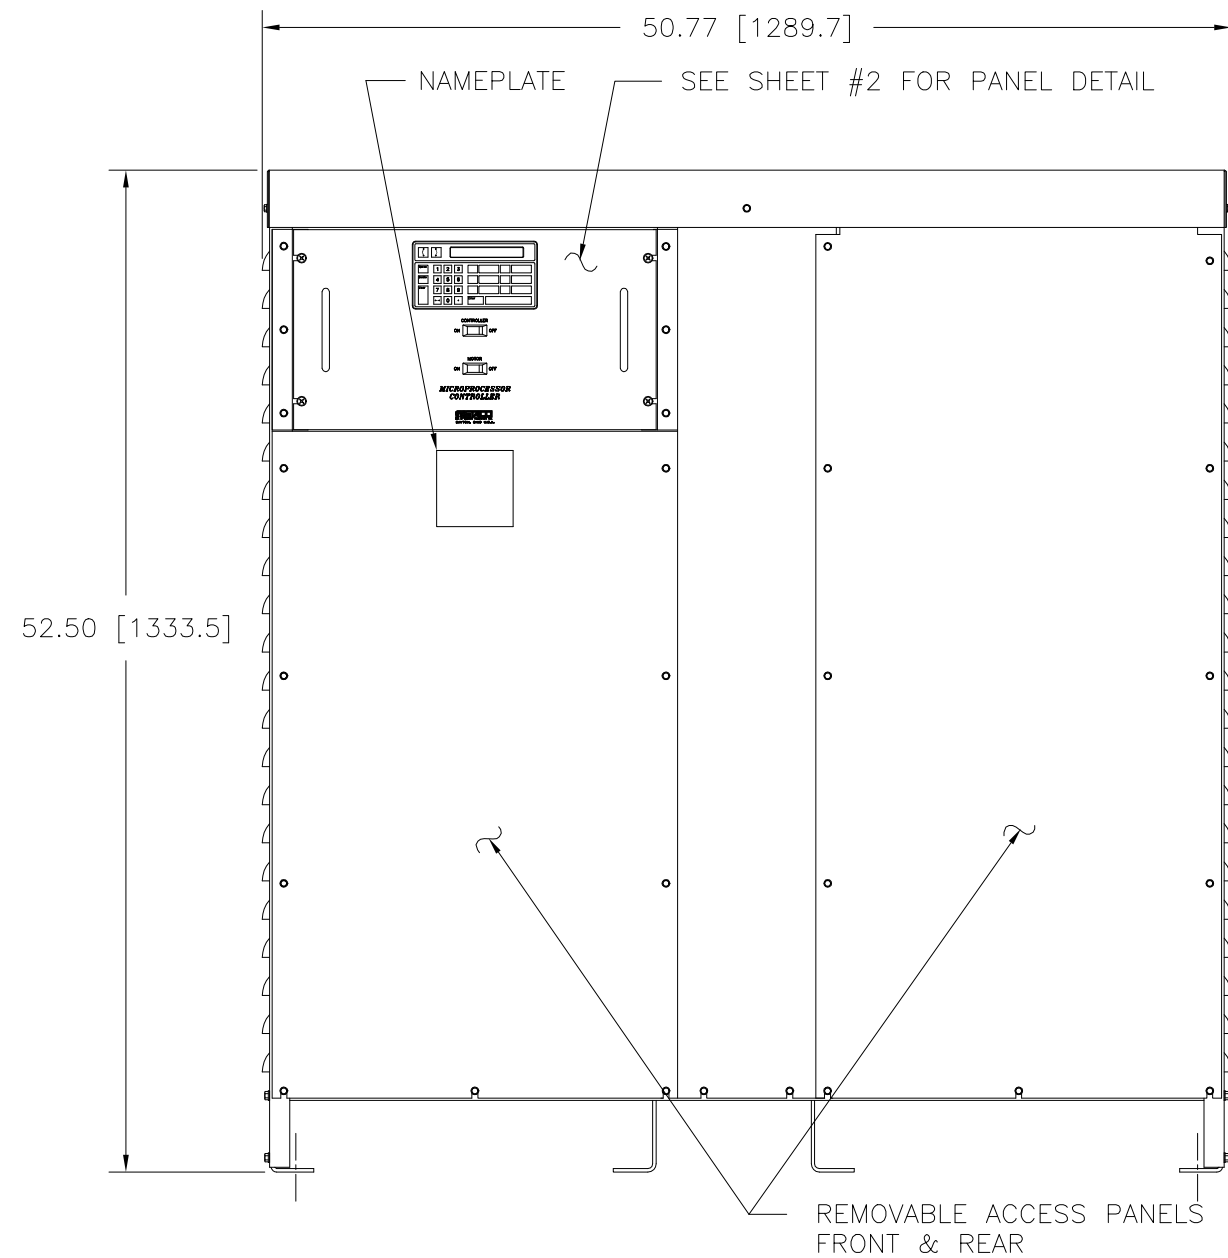


DWG. NO.	095-1925		
REVISIONS			
SYM.	E.C.N.	DATE	APVD.
A	24220	5/9/00	
ADDED TERMINAL RANGE			

Go to [VARIAC.com](http://VARIAC.com)  
to purchase and for  
technical support.  
Made in the USA

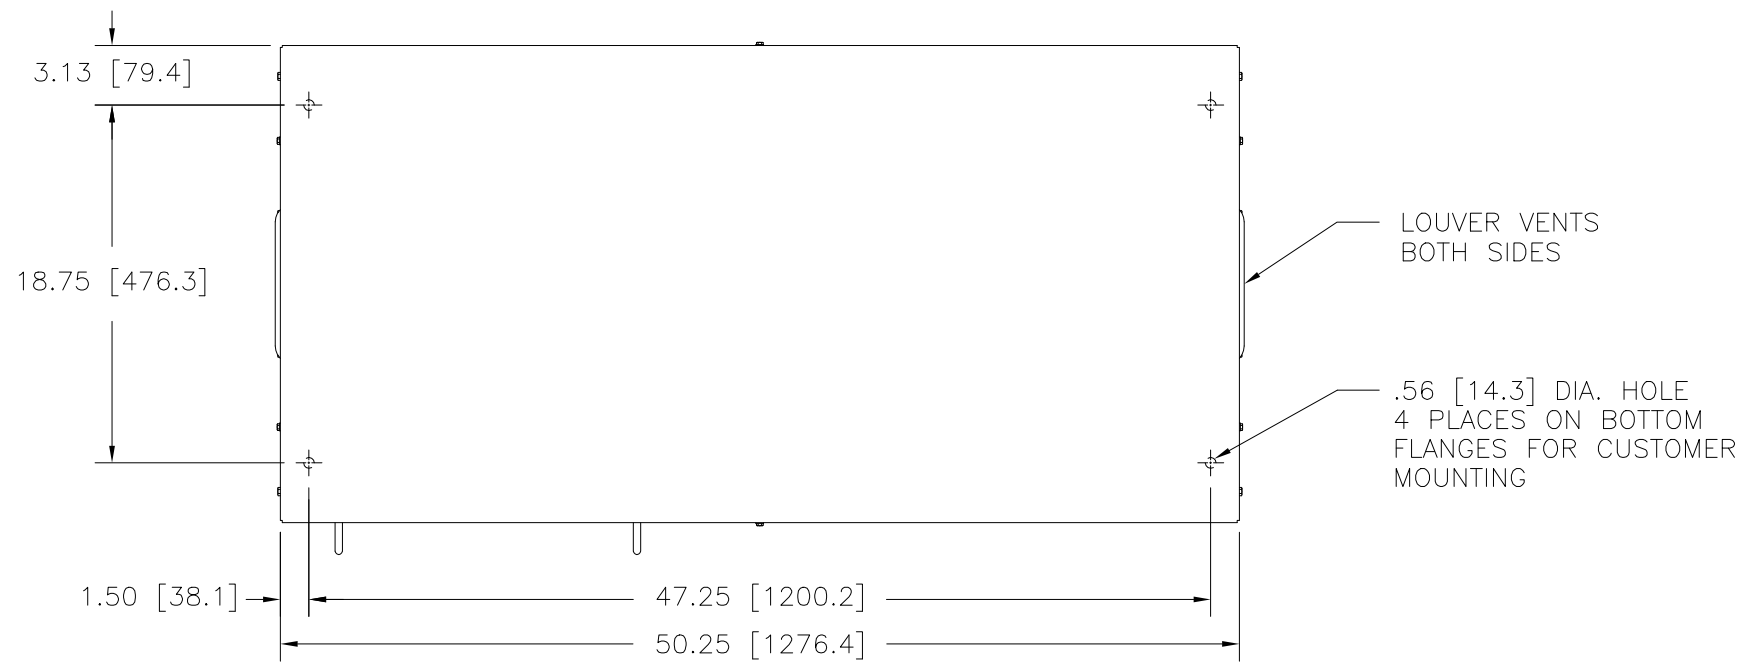

EACH PHASE OF THE REGULATOR COMPRISES A MOTOR-DRIVEN VARIABLE AUTOTRANSFORMER, A BUCK-BOOST FIXED RATIO TRANSFORMER, AND A MANUAL RAISE/LOWER SWITCH. THE MICROPROCESSOR CONTROLLER AUTOMATICALLY POSITIONS EACH OF THE AUTOTRANSFORMERS TO HOLD THE OUTPUT VOLTAGE OF EACH PHASE CONSTANT. A RS-232 INTERFACE IS PROVIDED FOR REMOTE OPERATION AND MONITORING.

SPECIFICATIONS:

WAVEFORM DISTORTION	-----	ZERO
FREQUENCY RANGE	-----	57Hz TO 63Hz
OUTPUT REGULATION	-----	± 1V
CONTROL BAND (USER SELECTABLE)	-----	* ±0.5V, ±1.0V, ±2.0V, ±4.0V
CORRECTION RATE	-----	19 VOLTS/SECOND
INTERNAL IMPEDANCE	-----	LESS THAN 1%
PHASE SHIFT	-----	NEGLIGIBLE
EFFICIENCY	-----	99% TYPICAL
TEMPERATURE RANGE	-----	0°C (32°F) TO +40°C (104°F)

\* FACTORY SET AT ±0.5V

WIRE RANGES FOR CUSTOMER WIRING:

INPUT/OUTPUT/NEUTRAL TERMINALS: (1) (350MCM-#6 AWG) COMPRESSION PER PHASE  
GROUND TERMINAL: (1) (1/0-#14 AWG) COMPRESSION

CONTROLS:

MICROTERMINAL: THE TERMINAL IS PROVIDED FOR LOCAL CONTROL OF THE UNIT WITH AN LCD DISPLAY FOR OUTPUT VOLTAGE READINGS. SEE THE MP USER'S HANDBOOK (FORM #003-1622) FOR DETAILED INFORMATION.

CONTROLLER ON/OFF SWITCH: THIS SWITCH TURNS OFF POWER TO THE MICROPROCESSOR CONTROLLER ONLY.

MOTOR ON/OFF SWITCH: THIS SWITCH TURNS OFF POWER FROM THE MICROPROCESSOR TO EACH OF THE AUTOTRANSFORMER MOTORS.

RAISE/LOWER SWITCHES: THESE SWITCHES ARE LOCATED INTERNALLY AND ARE ACCESSIBLE FROM THE FRONT VIA THE REMOVABLE ACCESS PANEL. THE SWITCHES ALLOW FOR EACH PHASE OF THE REGULATOR TO BE MANUALLY CONTROLLED INDIVIDUALLY.

\*\* AT NOMINAL OUTPUT VOLTAGE INPUT VOLTAGE RANGE  
SHIFTS PROPORTIONALLY WITH OUTPUT VOLTAGE SETTINGS.

THREE PHASE (INDIVIDUAL LINE CONTROL)			60 HZ
OUTPUT VOLTAGE (ADJUSTMENT)	INPUT VOLTAGE RANGE **	MAXIMUM OUTPUT AMPERES	RATED OUTPUT (KVA)
480Y/277	432-528	300	249
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS * DECIMALS .12 Holes .002 XX .005 XXX .005		TITLE: SPEC. CONTROL DRAWING AUTO. VOLTAGE REGULATOR TYPE: CVR-48QCIY249	
MATERIAL:		UNITS IN [mm]	
ALL DIMENSIONS APPLY AFTER PLATING		DO NOT SCALE DWG.	
DRAWN BY: TIM RAU		DATE: 3/5/97	FIRST USED ON: 095-1925
CHECKER:		DATE:	WEIGHT APPROX.:
ENGINEER:		DATE:	SCALE: .2=1
THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF STACO ENERGY PRODUCTS CO., WHICH RESERVES ALL PATENT, PROPRIETARY, DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS THEREIN, AND TO ANY ARTICLE DISCLOSED THEREIN EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY PARTS.		CUSTOMER APPROVAL: DATE:	
DWG. NO. 095-1925		SHEET 1 OF 2	

